


Features

DO-201AD

TSA

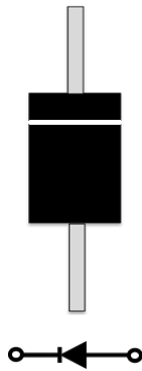

Applications

Maximum ratings and electrical characteristics (T<sub>J</sub> = 25°C unless otherwise noted)

		( )		
			5	
		( )		
		( )		

( ) 4 n %

( ) 0





5HY

( )



76\$ /


### RATINGS AND CHARACTERISTICS CURVES ( )

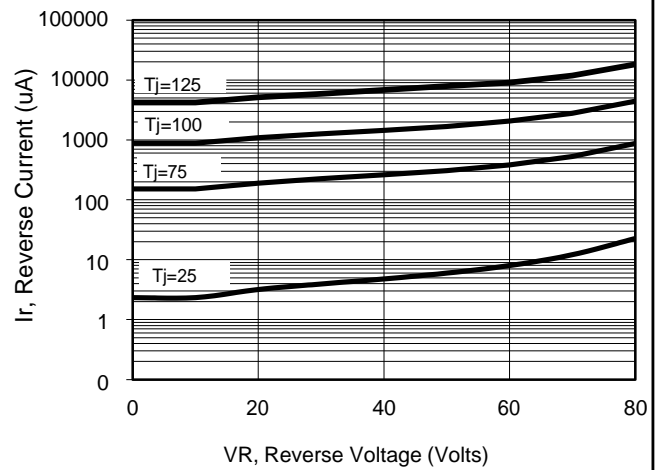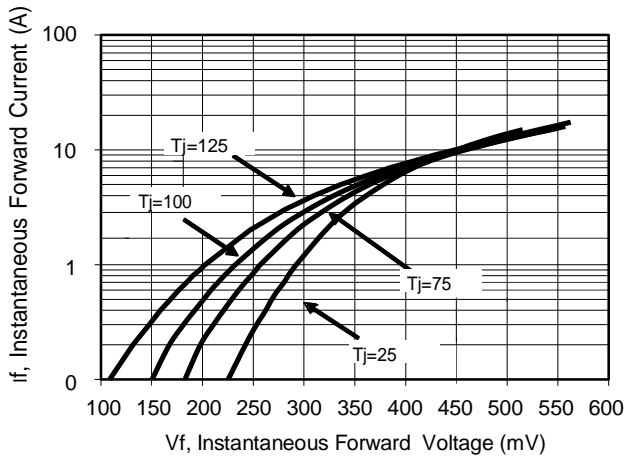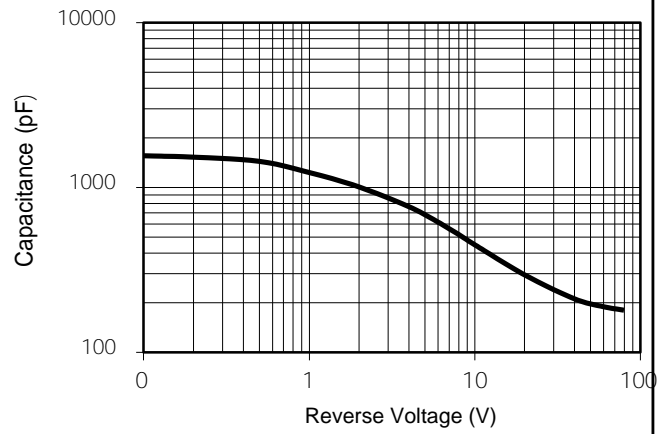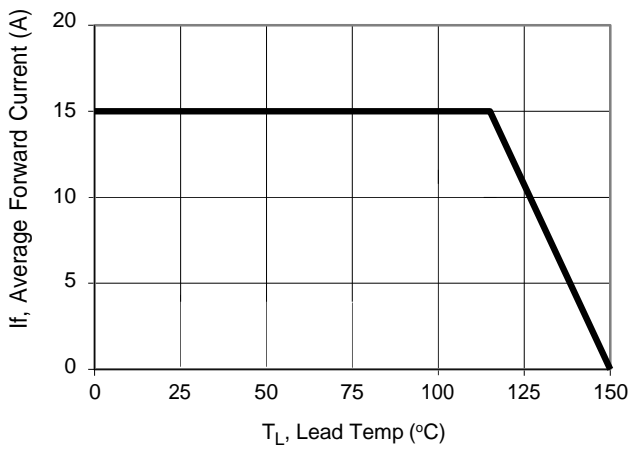



76\$ /

**PACKAGE OUTLINE DIMENSIONS**

**DO-201AD**

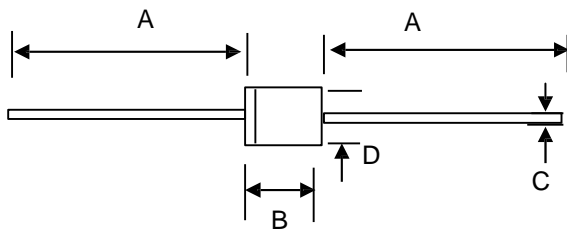

				4	
				1	







( )  
( )

DWU ] b[ ' =bZcf aUh] cb

% =bg] XY 6cl

&' G hg] XY 6cl



DWU ] b[ ' =bZcf aUh] cb

BC	I B=H	% =bg] XY 6cl			G hg] XY 6cl		
G] nY	aa	@%	K%	<%	@&	K&	<&
		&)	+) )	%4	4		