


Trench MOS Barrier Schottky Rectifier

DO-201AD

TSA /

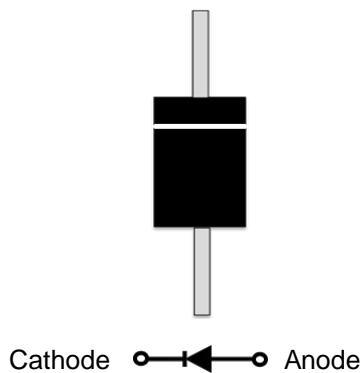

Features

- Advanced trench technology
- Low forward voltage drop
- Low power losses
- High efficiency operation
- Lead Free Finish, RoHS Compliant

Applications

- DC/DC Converters
- AC/DC Adaptors
- Switching Power Supplies
- Freewheeling Diodes





Maximum ratings and electrical characteristics ($T_J = 25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	Limit		Unit
Maximum repetitive peak reverse voltage	VRRM	80		V
Maximum average forward rectified current	IF(AV)	15		A
Peak forward surge current 8.3 ms single half sine-wave superimposed on rated load per diode	IFSM	180		A
Operating junction and storage temperature range	T_J, T_{STG}	- 0 to +150		$^\circ\text{C}$
Typical thermal resistance per leg	$R_{\Theta JC}$	22		$^\circ\text{C}/\text{W}$
Instantaneous forward voltage per diode		TYP.	MAX.	
	IF=3A $T_J=25^\circ\text{C}$	0.	0.	V
	IF=3A $T_J=125^\circ\text{C}$	0.	-	
	IF=15A $T_J=25^\circ\text{C}$	0.59		
	IF=15A $T_J=125^\circ\text{C}$	0.	-	
Instantaneous reverse current per diode at rated reverse voltage	$T_J=25^\circ\text{C}$	20	50	uA
	$T_J=125^\circ\text{C}$	-	20	mA

Notes:


(1) Pulse test: 300 μs pulse width, 1 % duty cycle

(2) Pulse test: Pulse width ≤ 40 ms

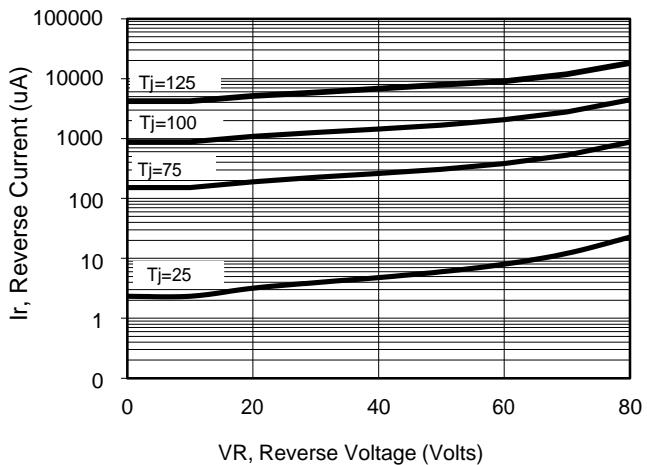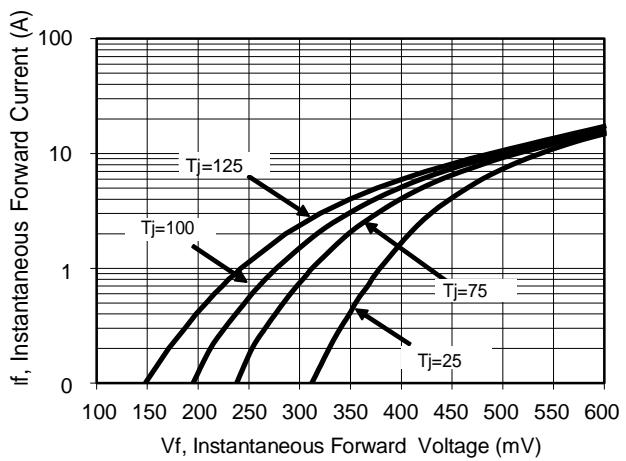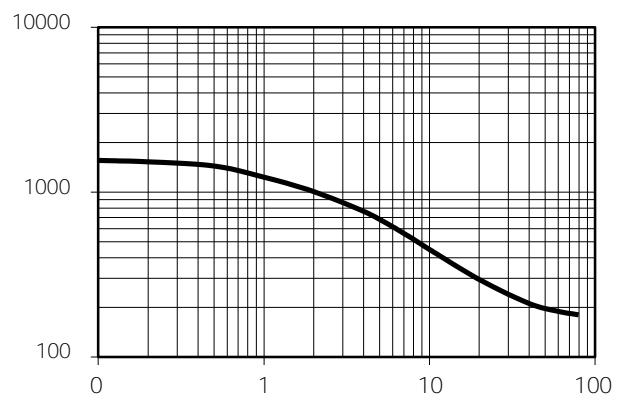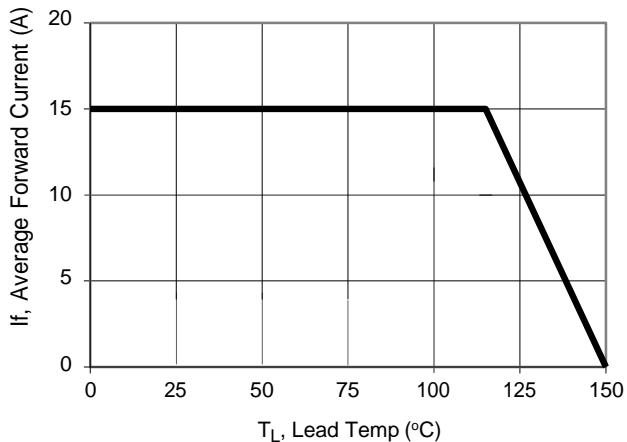RATINGS AND CHARACTERISTICS CURVES (TA = 25 °C unless otherwise noted)


PACKAGE OUTLINE DIMENSIONS

DO-201AD

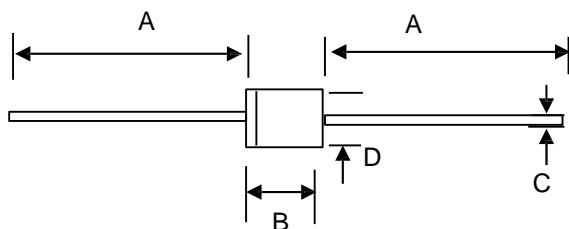


DO-201AD mechanical data

UNIT		A	B		D
mm	max	26.5	9.5	4	5.3
	min	24.5	7.3	1	4.8
mil	max	1043.30	374.01		208.67
	min	946.57	287.40		188.97


Marking Information

Cathode

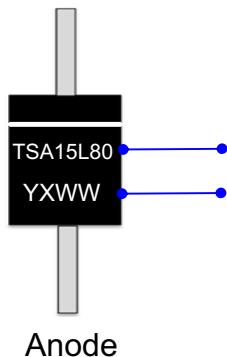

Product model : TSA15L80

PDC information




WW:Week code(01 to 53)

X:Internal identification code


Y:Year code(ex:0=2020)

Packaging Information

1.Inside Box

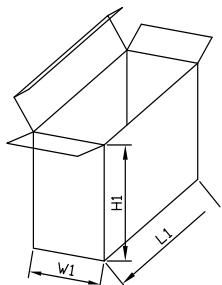

2.Outside Box

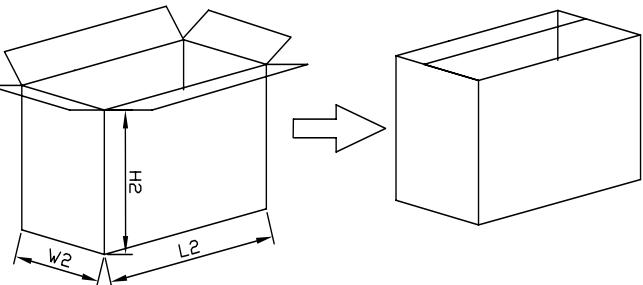

Packaging Information

NO	UNIT	Inside Box			Outside Box		
Size	mm	L1	W1	H1	L2	W2	H2
		255	75	1			