

## 7UHQFK 026 %DUULHU 6FKRWWN\ 5H

DO-201AD  
TSA 3



Cathode Anode

### Features

- ‡ \$GYDQWUHQFK WHFKQRORJ\
- ‡ /RZRUZDURQWDJH GURS
- ‡ /RZRZURVVHV
- ‡ +LJHILFLHQF\ RSHUDWLRO
- ‡ /HDGH)HLQLVK &R#6OLDQW

### Applications

- ‡ '&' & RQYHUWHUV
- ‡ \$&' & \$GDSWRUV
- ‡ 6ZLWFKRZHXSSOLHV
- ‡ )UHHZKH'HLRQJ

Maximum ratings and electrical characteristics (T<sub>J</sub> = 25°C unless otherwise noted)

3DUDPHWHU		6\PERO	/LPLW	8QLW
0D[LXPXPHSHVSHUNYHYURQWDJH		9550		9
0D[LXPYPYHURJHZDUG UFXEWHIQWG		,) \$9		\$
3HDN IRVZDURUHQW VLQDQHQZDYH VXSHULPBRQDURHSHGLRGH		,) 60		\$
2SHUDMXQEDQQRWRUDJH WHPSHUDW		X0H767°C	JH WR	f &
7\SLFVQCHUPDO USHVULVQHDQFH		'2 \$'	5\$-&	f & :
,QVWDQWDQHRRQWRUJZDUG SHGLRGH	,) \$	7- f &	7 < 3	0\$;
	,) \$	7- f &		
	,) \$	7- f &		
	,) \$	7- f &		
,QVWDQWDQHRXUUSHQWRUJZDUG UDWHYHYURQWDJH	7- f &	,5		X\$
	7- f &			P\$




1RWHV

3XOVH WHVVSXOVH ZLGWK GXW\F\FOH

3XOVH WHVW 3XOPH ZLGWK 0


**RATINGS AND CHARACTERISTICS CURVES** (TA = 25 °C unless otherwise noted) 5 0

, Temp (

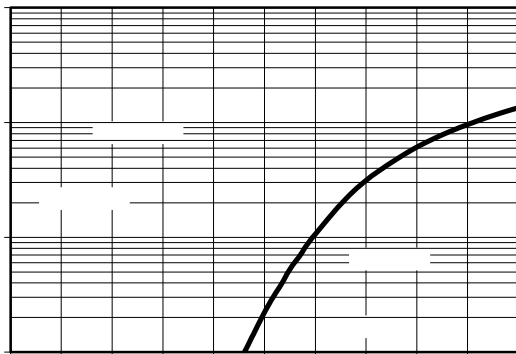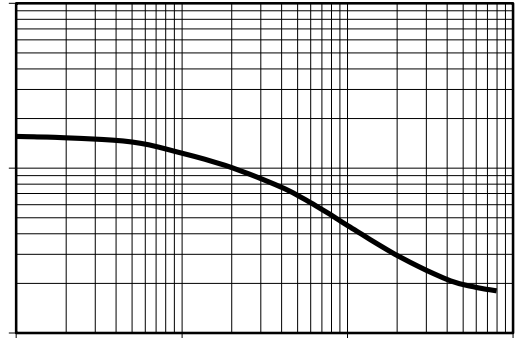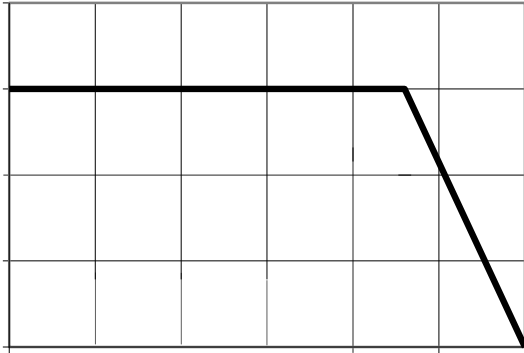

**PACKAGE OUTLINE DIMENSIONS**

**DO-201AD**

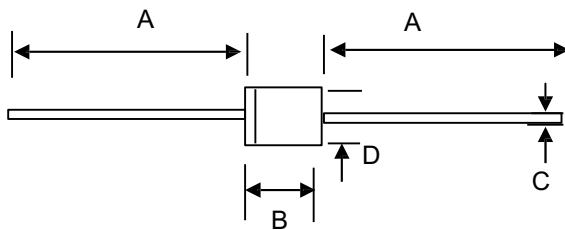


DO-201AD mechanical data

UNIT		A	B	C	D
mm	max	26.5	9.5	1.4	5.3
	min	24.5	7.3	1.1	4.8
mil	max	1043.30	374.01	5.1	208.67
	min	946.57	287.40		188.97

### Marking Information

Cathode




\$QRGH

Product model : TSA15P80



PDC information

Y X WW


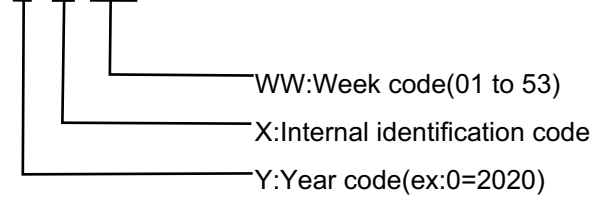


### Packaging Information

1. Inside Box



2. Outside Box



### Packaging Information

NO	UNIT	Inside Box			Outside Box		
		L1	W1	H1	L2	W2	H2
Size	mm	255	75	14	4	280	320
QTY	PCS	Smallest package,1000PCS/carton			10,000PCS/carton,10 boxes in total		
Note	Tolerance	≤20mm,±3mm;		21-100mm,±5mm;	101-500mm,±10mm		